



# 425 LXF

w/ SEAKEEPER




### PERFORMANCE DATA (Triple 600s)

| RPM  | MPH  | GPH   | MPG  |
|------|------|-------|------|
| 600  | 4.4  | 4.4   | 1.02 |
| 1000 | 6.7  | 7.0   | 0.96 |
| 1500 | 8.0  | 10.9  | 0.73 |
| 2000 | 9.4  | 17.7  | 0.53 |
| 2500 | 13.6 | 30.2  | 0.45 |
| 3000 | 23.7 | 44.1  | 0.54 |
| 3500 | 37.0 | 53.3  | 0.69 |
| 4000 | 41.6 | 55.4  | 0.75 |
| 4500 | 48.7 | 74.7  | 0.65 |
| 5000 | 55.6 | 87.1  | 0.64 |
| 5500 | 62.2 | 116.5 | 0.53 |
| 6000 | 69.9 | 159.8 | 0.44 |
| 6400 | 72.5 | 160.2 | 0.45 |

### 425 LXF SPECIFICATIONS

|                                 |            |
|---------------------------------|------------|
| Length                          | 42' 2"     |
| Beam                            | 13' 1"     |
| Dry Weight w/o engines (approx) | 16,800 lbs |
| Fuel Capacity                   | 500 gal    |
| Max HP                          | 1,800 HP   |

|                       |              |
|-----------------------|--------------|
| Top Speed (MPH@RPM) = | 72.5 @ 6403  |
| 0 – 20 MPH =          | 5.26 seconds |
| 0 – 30 MPH =          | 7.88 seconds |

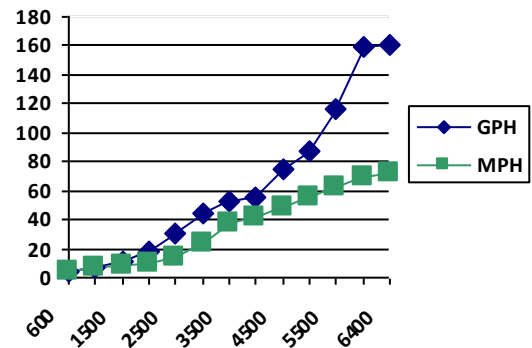

### MERCURY POWER

|                    |                       |
|--------------------|-----------------------|
| Outboard Models    | Triple V12 Verado 600 |
| Verado 12 SS Props | 37p/33p/37p           |

### TEST CONDITIONS

|                |          |
|----------------|----------|
| Test Personnel | 1        |
| Air Temp (°F)  | 67°      |
| Test Date      | 12.13.21 |

\*\* Test weight includes 1/4 tank of fuel, Seakeeper Gyro Stabilizer, batteries, safety & test equip.

Information in this report is approximate and subject to many variables. Use only as a guideline.

